


DETAIL A
SCALE 4:1

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	27 Ω	84 Ω	200 Ω
Minimum	- Ω	67 Ω	- Ω

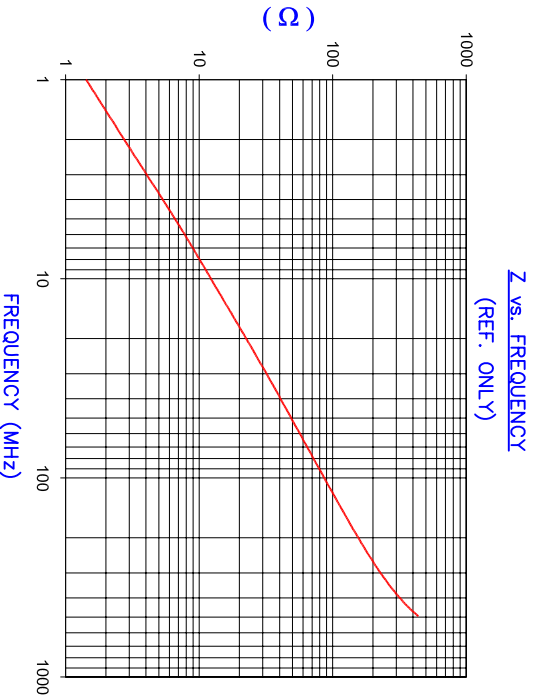

**UNCONTROLLED
DOCUMENT**

DIMENSIONS ARE IN mm[INCHES].

FERRITE CORE DIMENSIONS (SPEC): mm[Inches]
A 42.00 [1.654] + 0.50 [.020] 0.30 [.012]
B 37.50 [1.476] + 0.50 [.020] 0.30 [.012]
C 5.00 [.197] + 0.20 [.008]
D 5.00 [.197] + 0.36 [.014]
E 0.70 [.028] + 0.20 [.008]
WEIGHT/1000 4.21 kgs [9.28 Lbs]

CHANGE TOLERANCES		11/26/09	Jcd
H	UPDATE MIN Z SPECS & COMPANY LOGO	07/27/07	TMB
G	UPDATE MIN Z SPEC @100kHz ADD REF #	02/10/04	JRK
F	UPDATE MIN Z SPEC @100kHz ADD REF #	02/10/04	JRK
E	UPDATE PRINT FORMAT, UPDATE Z SPECS	02/26/03	JRK
D	NEW CNZ FORMAT, ADD Z CURVE UPDATE Z SPECS	08/14/02	JRK
C	UPDATE PRINT FOR ELECTRONIC DATABASE UPDATED P/N	08/19/96	BAC
B	ORIGINAL DRAFT	10/11/95	JBE
A	DESCRIPTION	DATE	INT

PROJECT/PART NUMBER: 28R1654-010		REV: H	PART TYPE: FERRITE RIBBON CORE	DRAWN BY: JBE
DATE: 10/11/95	SCALE: 2 : 1	MATERIAL: Ferrite		
CAD # 28R1654-010-H	TOOL # R1654			



SCALE DRAWING 1:1



28R1654-010