




TDA5101

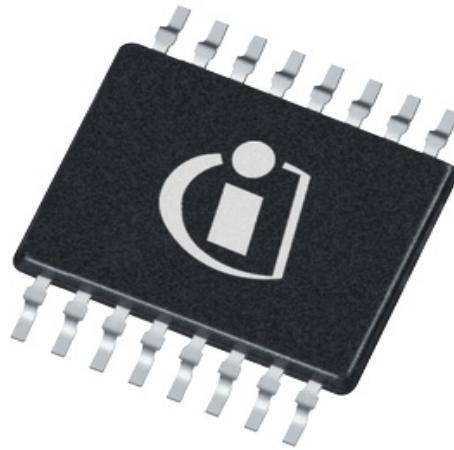

Parametric

Frequency Band
Channel Requirements per Band
Modulation Type
Transmit Power (@3V)
Temperature **min max**
Frequency Range (@ 25°C) **min max**
Frequency Range **min max**
Supply Voltage **min max**

TDA5101

315.0MHz
Single Channel
ASK / FSK
5.0dBm
-25.0°C 85.0°C
305.0MHz 324.0MHz
311.0MHz 317.0MHz
2.1V 4.0V

OPN

Product Status
Package Name
Completely lead free
Halogen free
RoHS compliant
Packing Size
Packing Type
Moisture Level

TDA5101XUMA1
discontinued
[PG-TSSOP-16](#)
yes
yes
yes
3000
TAPE & REEL
3