





Order Code	G (mm)	Ø D2 (mm)	Ø D1 (mm)	L (mm)	E (mm)	Ø f (mm)	Type	Packaging Unit
700970300	4,0	2,0	3,5	0,5	2,0-3,	2,0	1	1000
700970500	5,0	2,0	4,8	0,75	2,5-3,	2,0	1	
700970600	6,0	2,0	4,8	0,75	3,5-4,	2,0	1	






Drilling Hole



Pin
↓
Socket



Panel Thickness

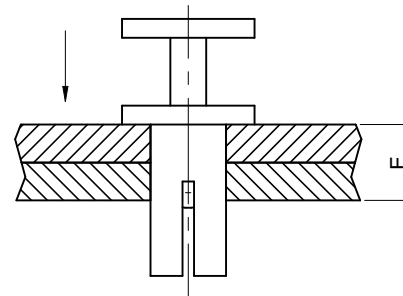

Flammability according to: UL94 V-2

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 79 42 945 - 0

www.we-online.com
eiSos@we-online.com



CREATED
D. Fandrey

CHECKED
S. Klingler

PROJECTION
METHOD

SCALE
5 : 1

DESCRIPTION
**AsEXRV
Snap rivet**

MATERIAL
Nylon 66, black

GENERAL TOLERANCE
DIN ISO 2768 T1m

ORDER CODE
700970x00

WEIGHT STATUS
Released

REV DATE
1.0 2016-03-07

DE Revision
2.0