

1

2

3



4

5






6

7

Length

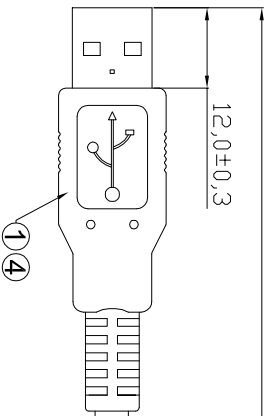

Cable White print
 E320444 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---c AWM III A 80°C 30V FT1 USB CABLE



A

A

B

B

C

C

D

D

E

E

F



F

G

G

H

H

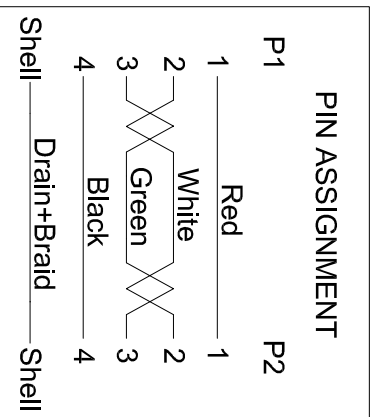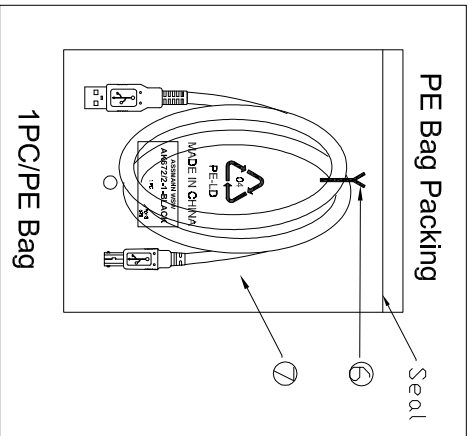

WSW P/N	Jacket color	Length(mm)
AK672/2-1-BLACK	Black	1000±30
AK672/2-2-BLACK	Black	2000±50
AK672/2-3-BLACK	Black	3000±50
AK672/2-5-BLACK	Black	5000±50

- Electrical test:
- 100% short, open, miswire test
 - Conduct resistance: 2 Ohm max.
 - Insulator resistance: 10Mohm min.
 - Dielectric test: DC 300V

NO.	NAME:	QTY	SPECIFICATION
①	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
②	TIE	1	Black
③	Out Jacket	6g	Black PVC-45P
④	Out Jacket	6g	Black PVC-45P
⑤	Cable	1	Black USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
⑥	CONN	1	USB 2.0 B Male Shell:Nickel Pin:G/F Insulator color: White
⑦	CONN	1	USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color:White

RoHS compliant
 Unit: mm

Scale	Free	Free	Free
TOLERANCE			
DIM	TOL		
Angle	TOL		
	Id.	Modification	Date
	①	Update the drawing	26.01.2016
	②	Drawn	11.02.2014

Customer-No.	Name	Date	Approved
ASSMANN WSW-No.	Joanna	11.02.2014	Drawn
AK672/2-X-BLACK	Amy	26.01.2016	Approved

1 2 3 4 5 6 7



ASSMANN WSW-No.
 AK672/2-X-BLACK

Drawing-No.
 ASS 7067 CA

rev01

Replace

Sheet