



N= NUMBER OF CONCATS

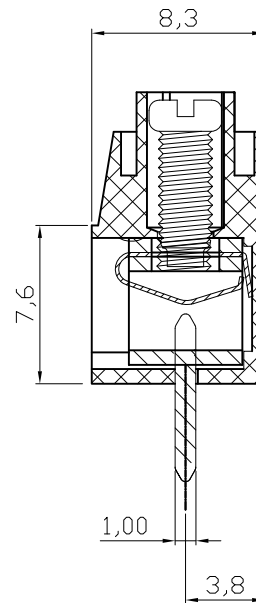

P.C.B LAYOUT

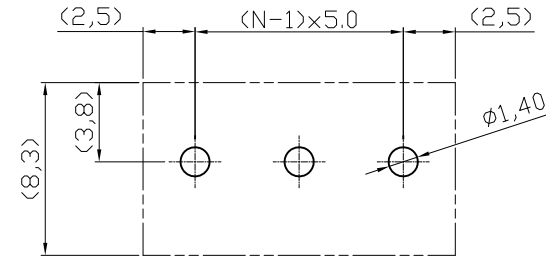

Material

- 1.Terminal body (metal housing): Brass stamped
- 2.Terminal screw:Steel Zinc plating"-slot type
- 3.Wire guard:Stainless steel
- 4.Surface of solder tail:Tin plated
- 5.Insulator (housing): Thermoplastic (UL94V-0), Grey

Electrical UL/ cUL

- 1.Voltage rating: 300VAC/250VAC
- 2.Current rating: 10A/15A
- 3.Wire range:
- 4.Solid wire(AWG): 12-22/12-20
- 5.Stranded wire(AWG):12-22/12-20
- 6.Torque(Lb-In): 3.5
- 7.Screw:M2.5
- 8.Wire strip length:6-7mm
- 9.Withstanding Voltage: 1.6KV/1.5KV
- 10.Operating temperature: -30°C to +105°C
- 11.Soldering temperature: 250°C±10°C/5 Sec
- 12.Safety Approval:

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	12.05.2009	Dean	ASSMANN WSW-No. <b>A-TB500-TKxxSB</b>
X.	±0.50					Approved	12.05.2009	Hellwig	
X.X	±0.30								
X.XX	±0.10								
DIM	TOL								
X.°	±1°								Drawing-No.
		①	Drawn	12.05.2009	Dean			ASS 3513 CO rev01	
Angle	TOL	Id.	Modification	Date	Name			Replace	Sheet