
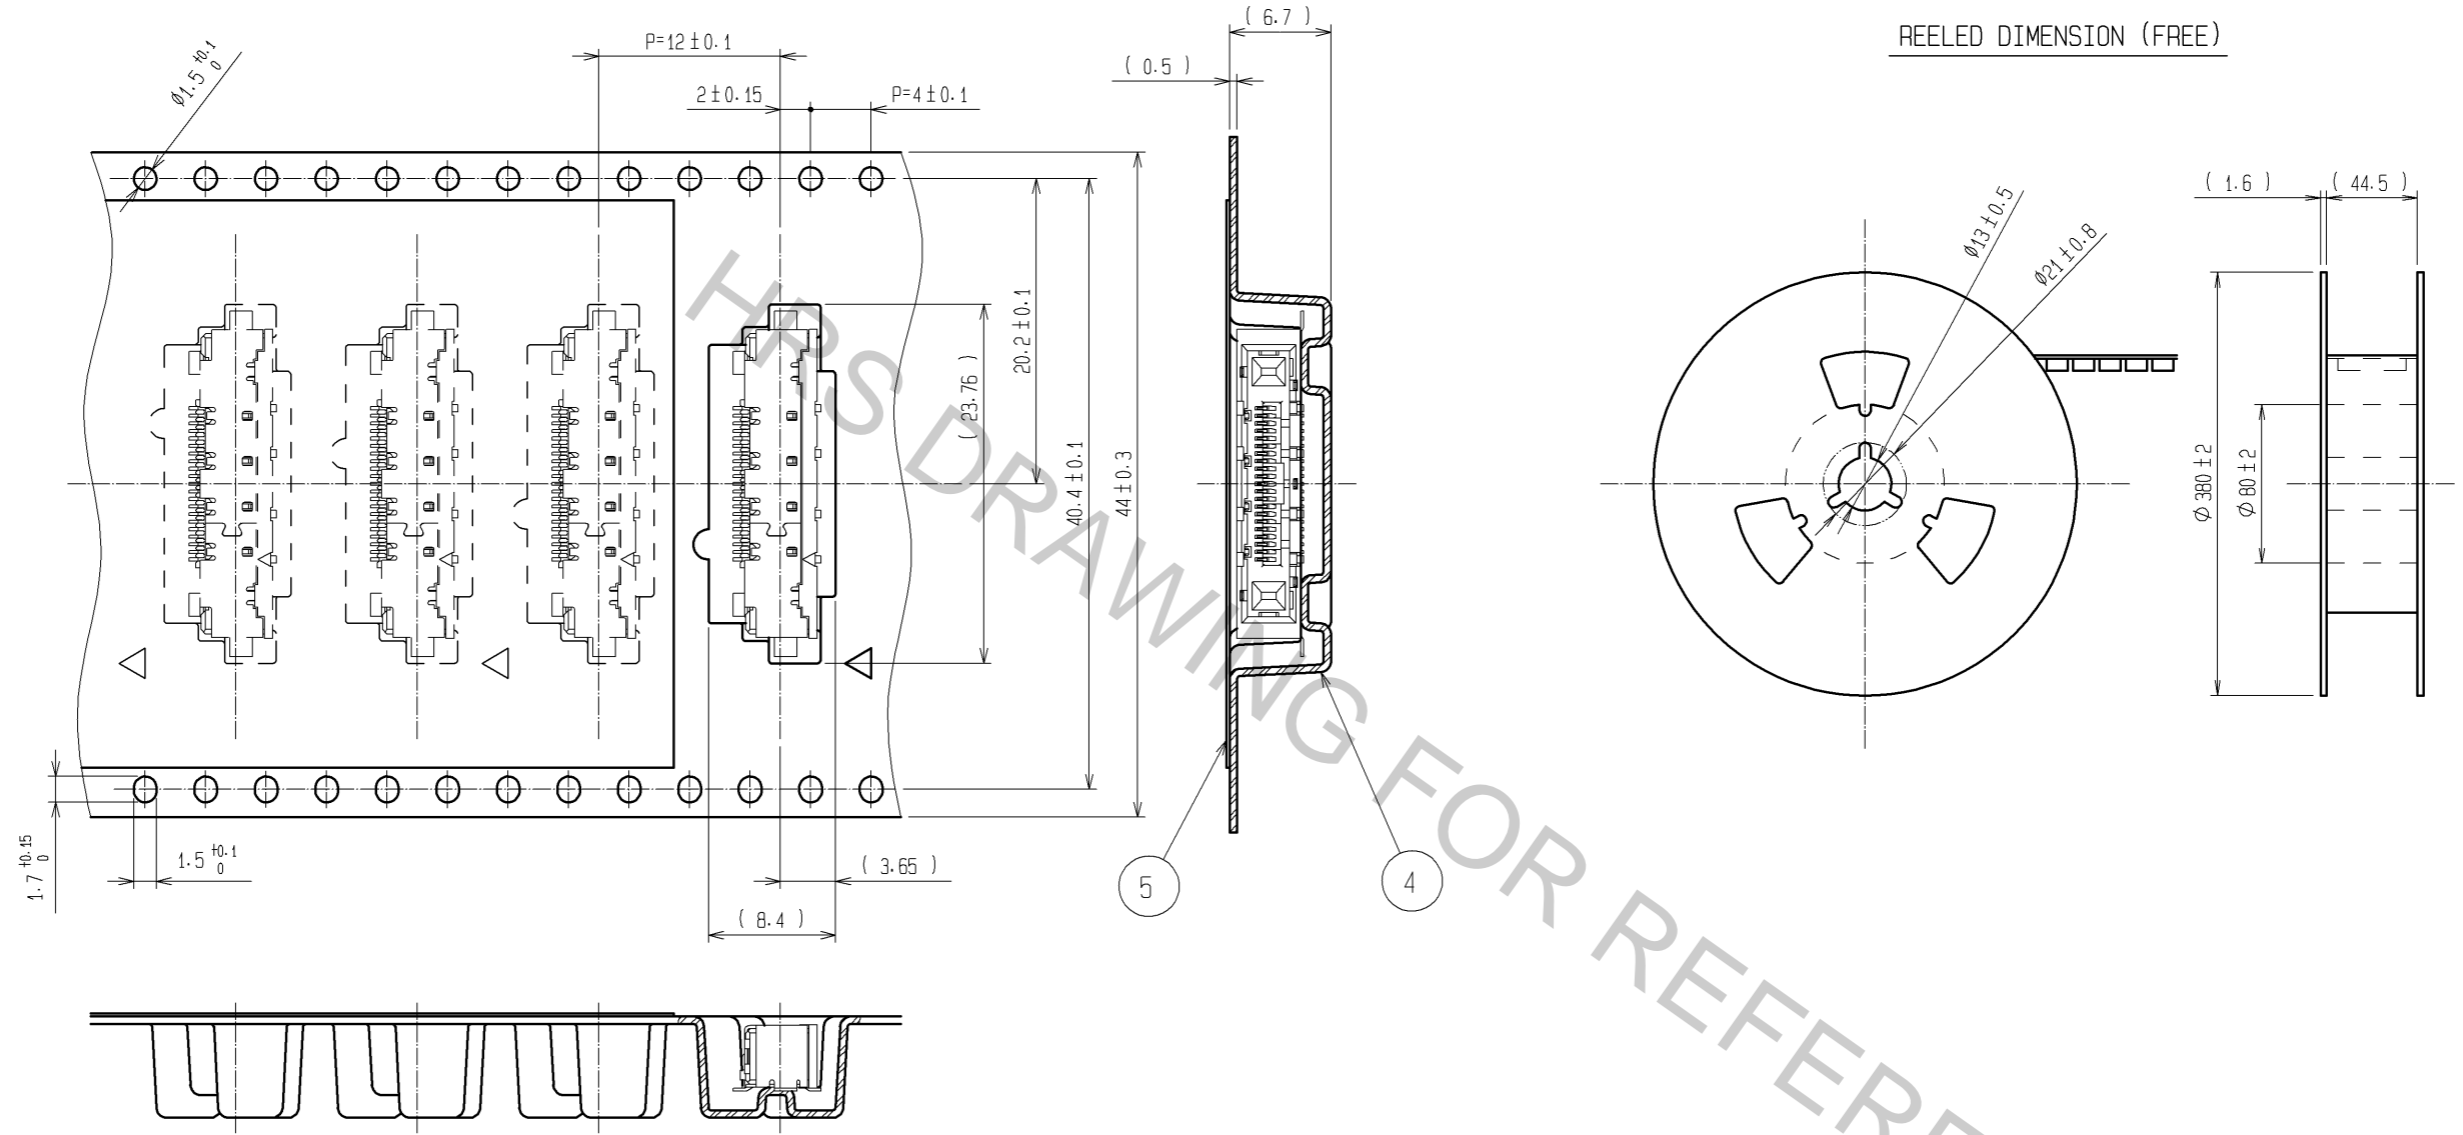


- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.  
 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.  
 3 ( ) INDICATES A REFERENCE DIMENSION.  
 4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.  
 5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.



5	PE	(COVER TAPE)						
4	PS	(EMBOSSD CARRIER TAPE)						
2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1#m min UNDER PLATING:NICKEL 0.2#m min						
1	LCP	BLACK, UL94V-0						
3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1#m min LEAD AREA:GOLD 0.03#m min UNDER PLATING:NICKEL 1#m min						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		5 : 1						
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	11.09.15	DRAWING NO. EDC3-157339-02				
		CHECED : HT. YAMAGUCHI	11.09.15	PART NO. FX16-21S-0.5SH(30)				
		DESIGNED : TS. MIYAKI	11.09.15	CODE NO. CL575-3411-5-30				
		DRAWN : TS. MIYAKI	11.09.15					

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT



REELED DIMENSION (FREE)

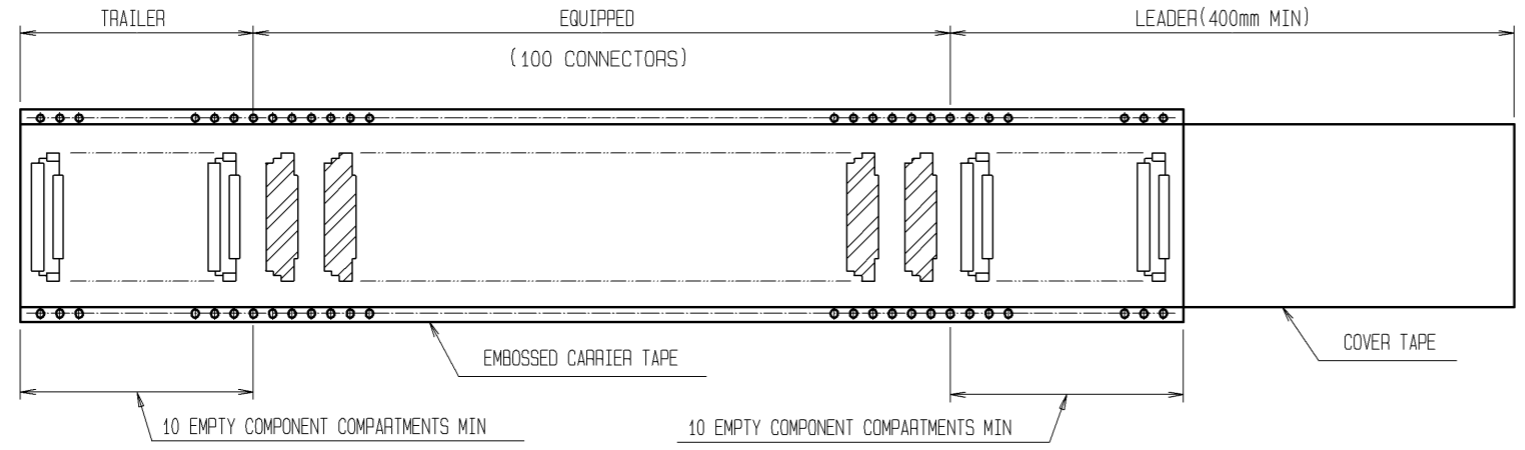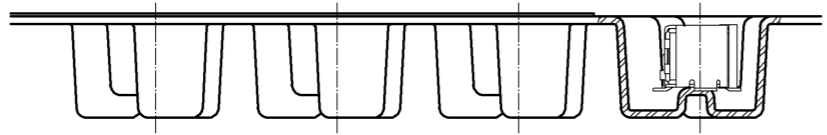

<b>HRS</b>	DRAWING NO.	EDC3-157339-02	
	PART NO.	FX16-21S-0.5SH(30)	
	CODE NO.	CL575-3411-5-30	

Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.