


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00502	Connector, stereo plug, 3.5xL20.5 mm, brass, gold plated, molding style	1	
2	30-00653	Wire, 2C TS, 28 AWG, 150V, 70C, 2.6 mm, spiral shield, TPU	1	Bio-compatible jacket
3	24-00028	Overmold, TPE, black	1	
4	Heat Shrink	Heat shrink tube, black	1	
5	Heat Shrink	Heat shrink tube, black	1	Covers shield wire

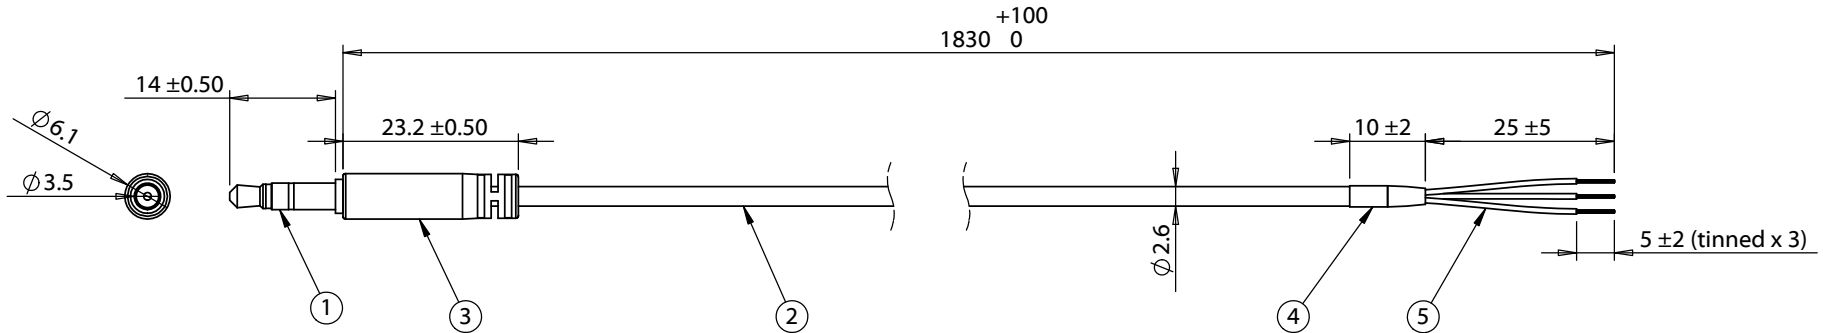

Wiring diagram	
50-00502	Wire Color
A	White
B	Black
C	Shield

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	10/20/2015	Initial release		RoHS and REACH compliant			
A1	11/11/2015	Modified overmold material	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT			
A2	01/07/2016	Modified dimensions		Functionally equivalent components may be used			
			DIMENSIONS ARE IN MILLIMETERS	Drawing in third angle projected			
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Cable, 1830 mm, 3.5 mm 3C 50-00502 slim audio plug to 5 mm tinned, 28 AWG, 30-00653, shielded	SIZE A	PART NUMBER 10-02045	
					SCALE: 1:1	WEIGHT:	SHEET 1 OF 1