
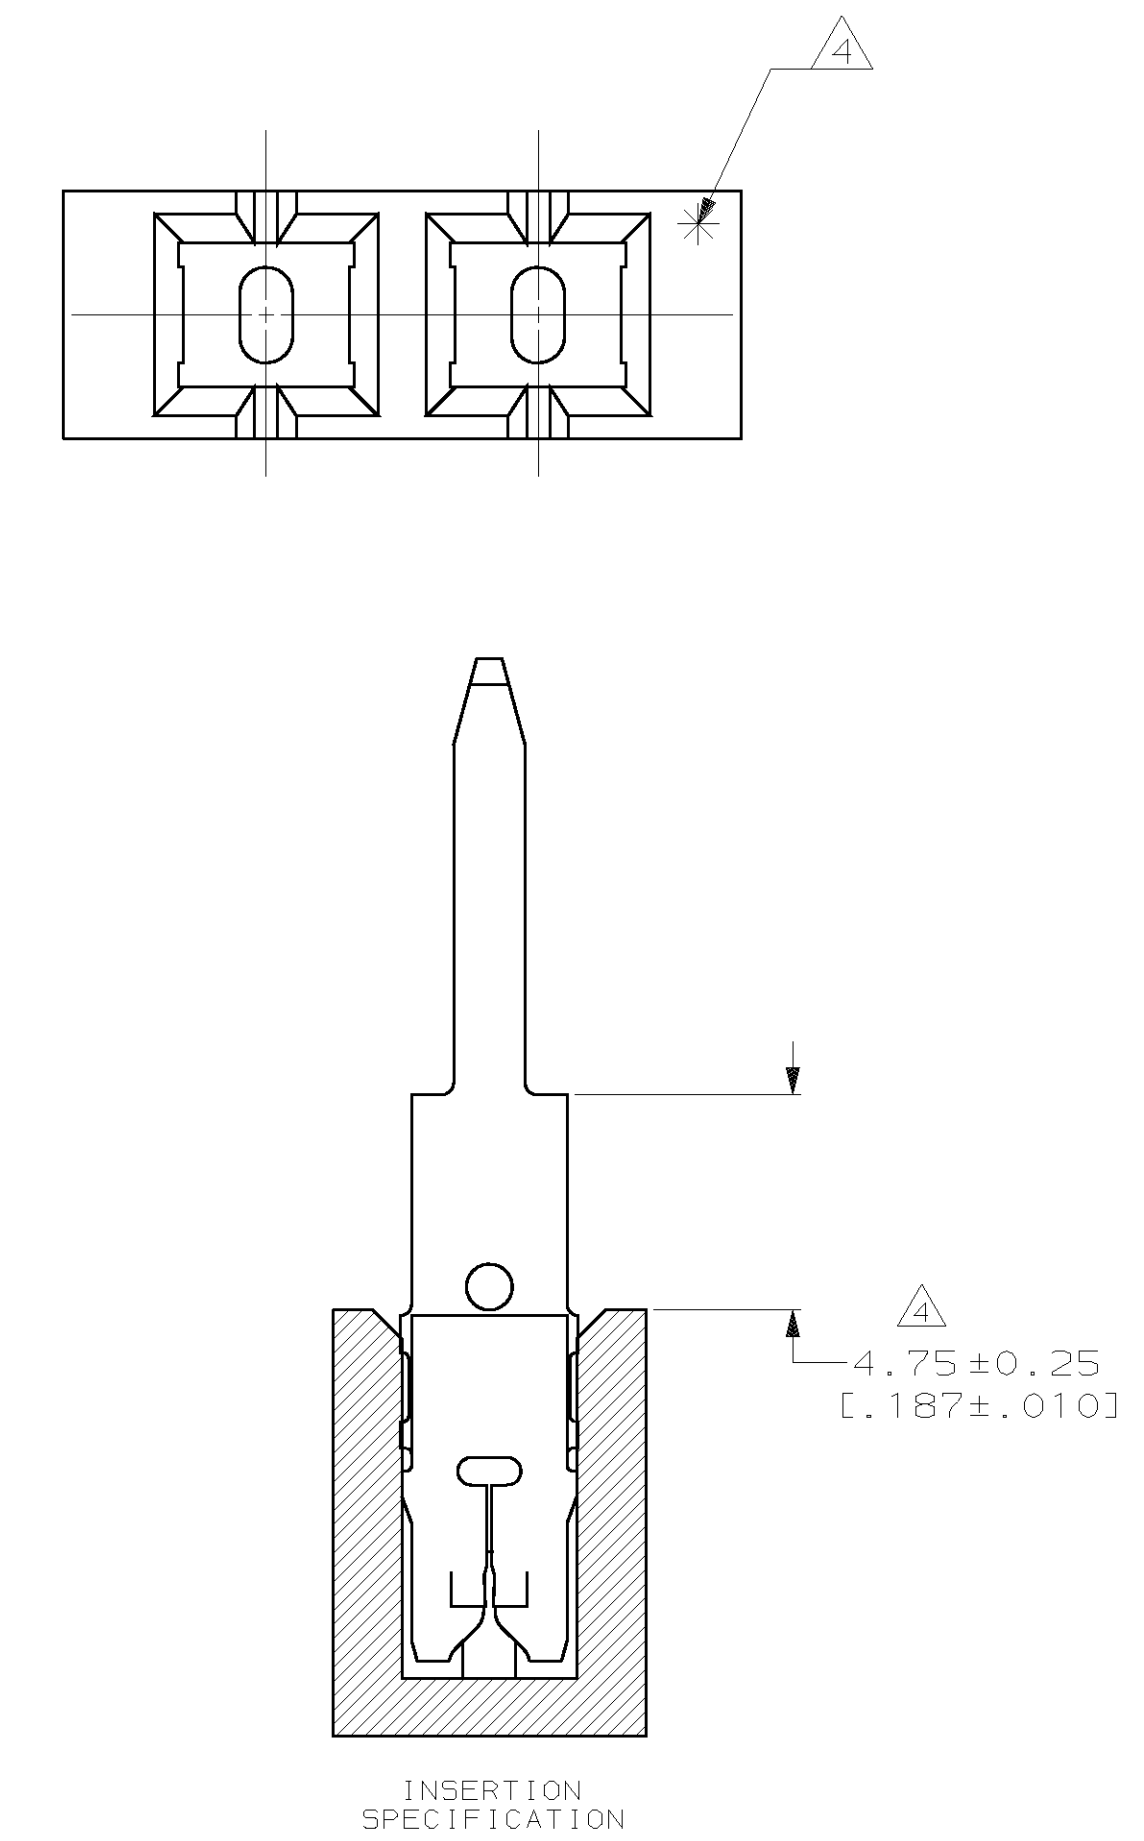
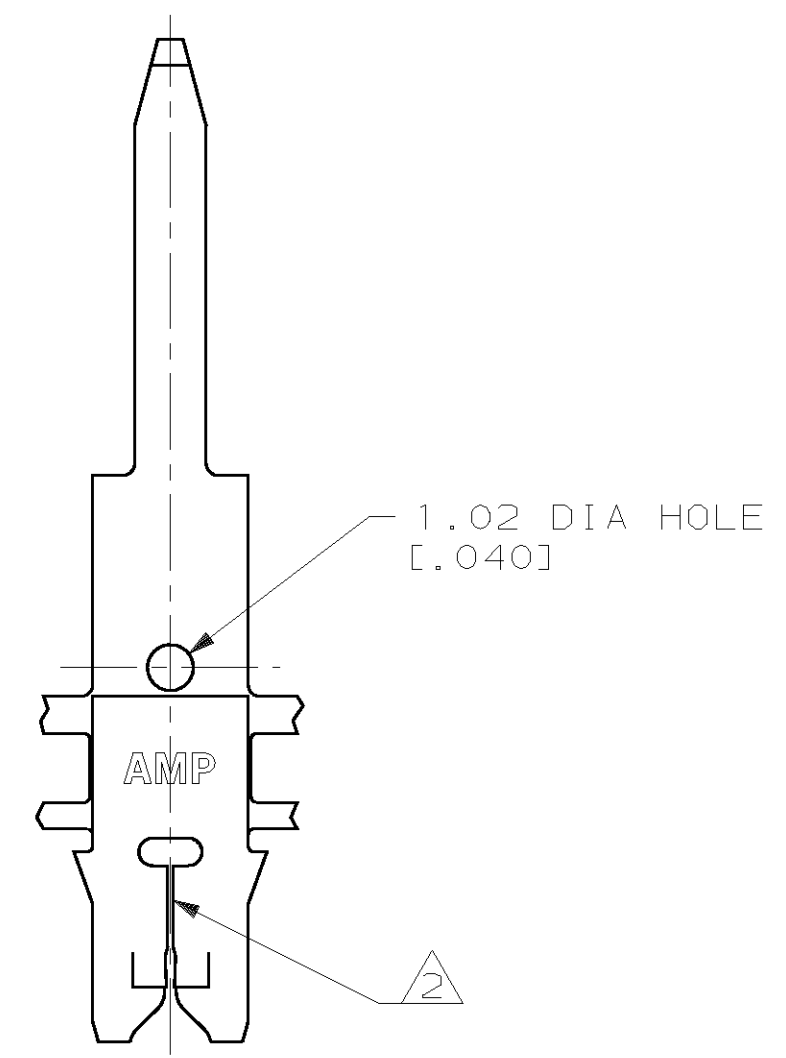
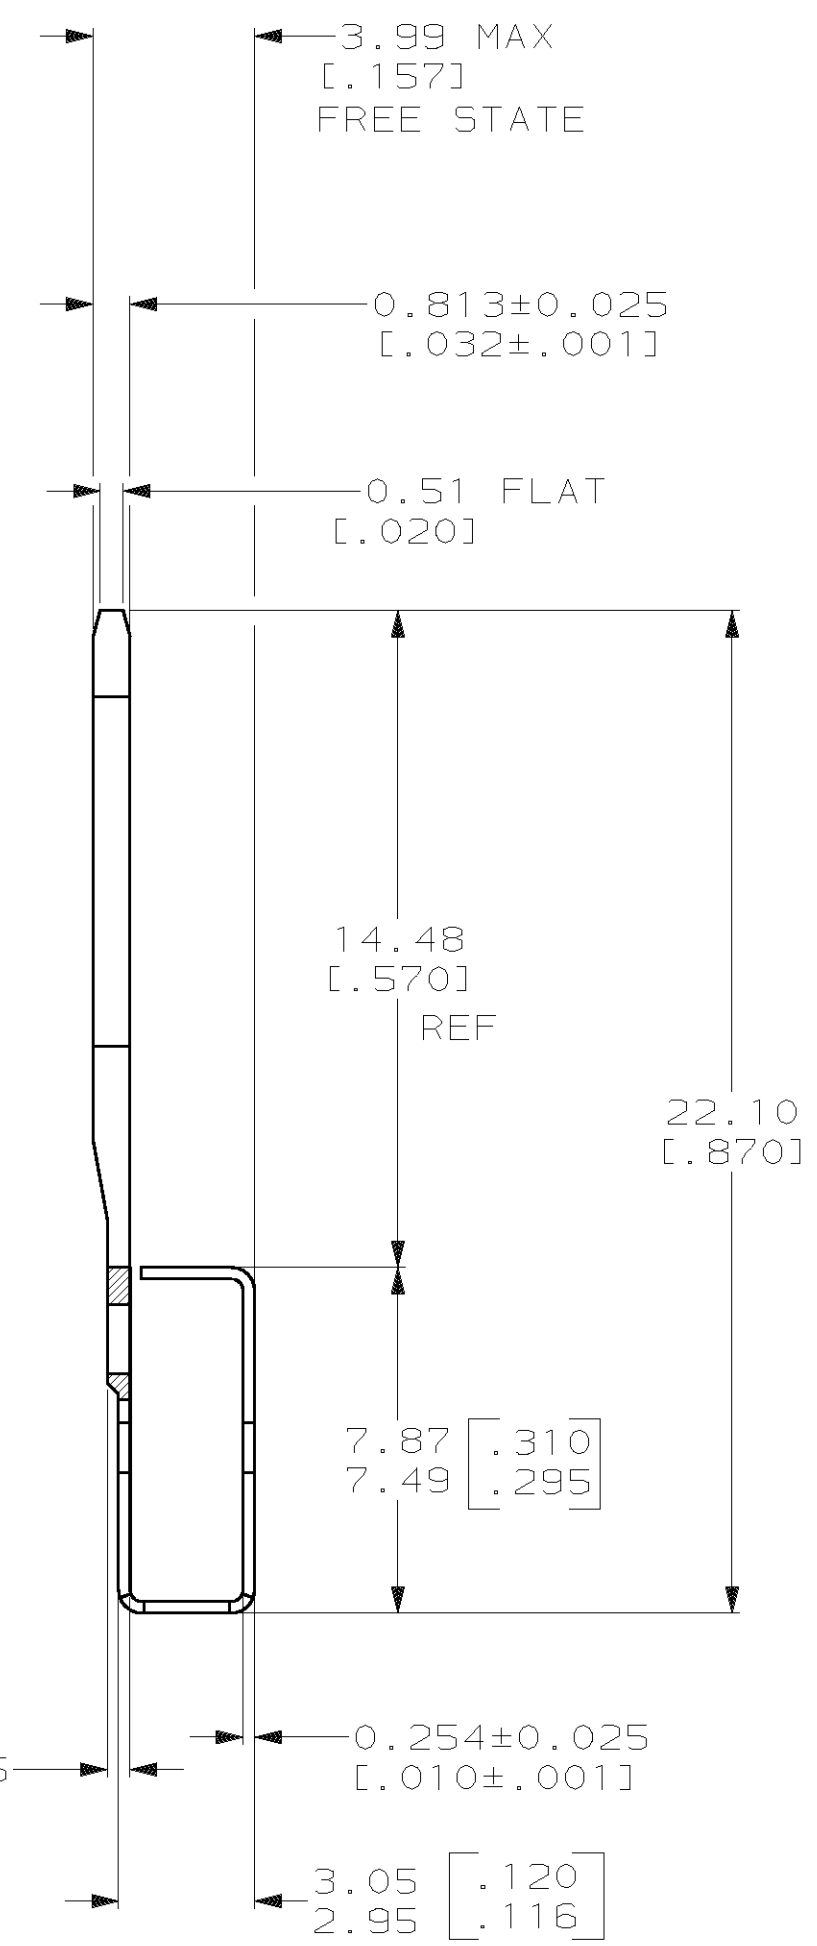


LOC		DIST		P		ZONE		LTR		REVISIONS		DATE	APPD
AF	50									E	REVISED PER 063A-0035-99	30 JUN 99	MF-KR

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 6.00±0.08 [.236±.003] CENTERS.
- 2 SLOT TERMINATES EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME TYPE AND SIZE, COPPER 0.23mm [#31] AWG.
- 3 AFTER INSERTION INTO PLASTIC HOLDER, TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 POINT OF MEASUREMENT LOCATED APPROXIMATELY AS SHOWN

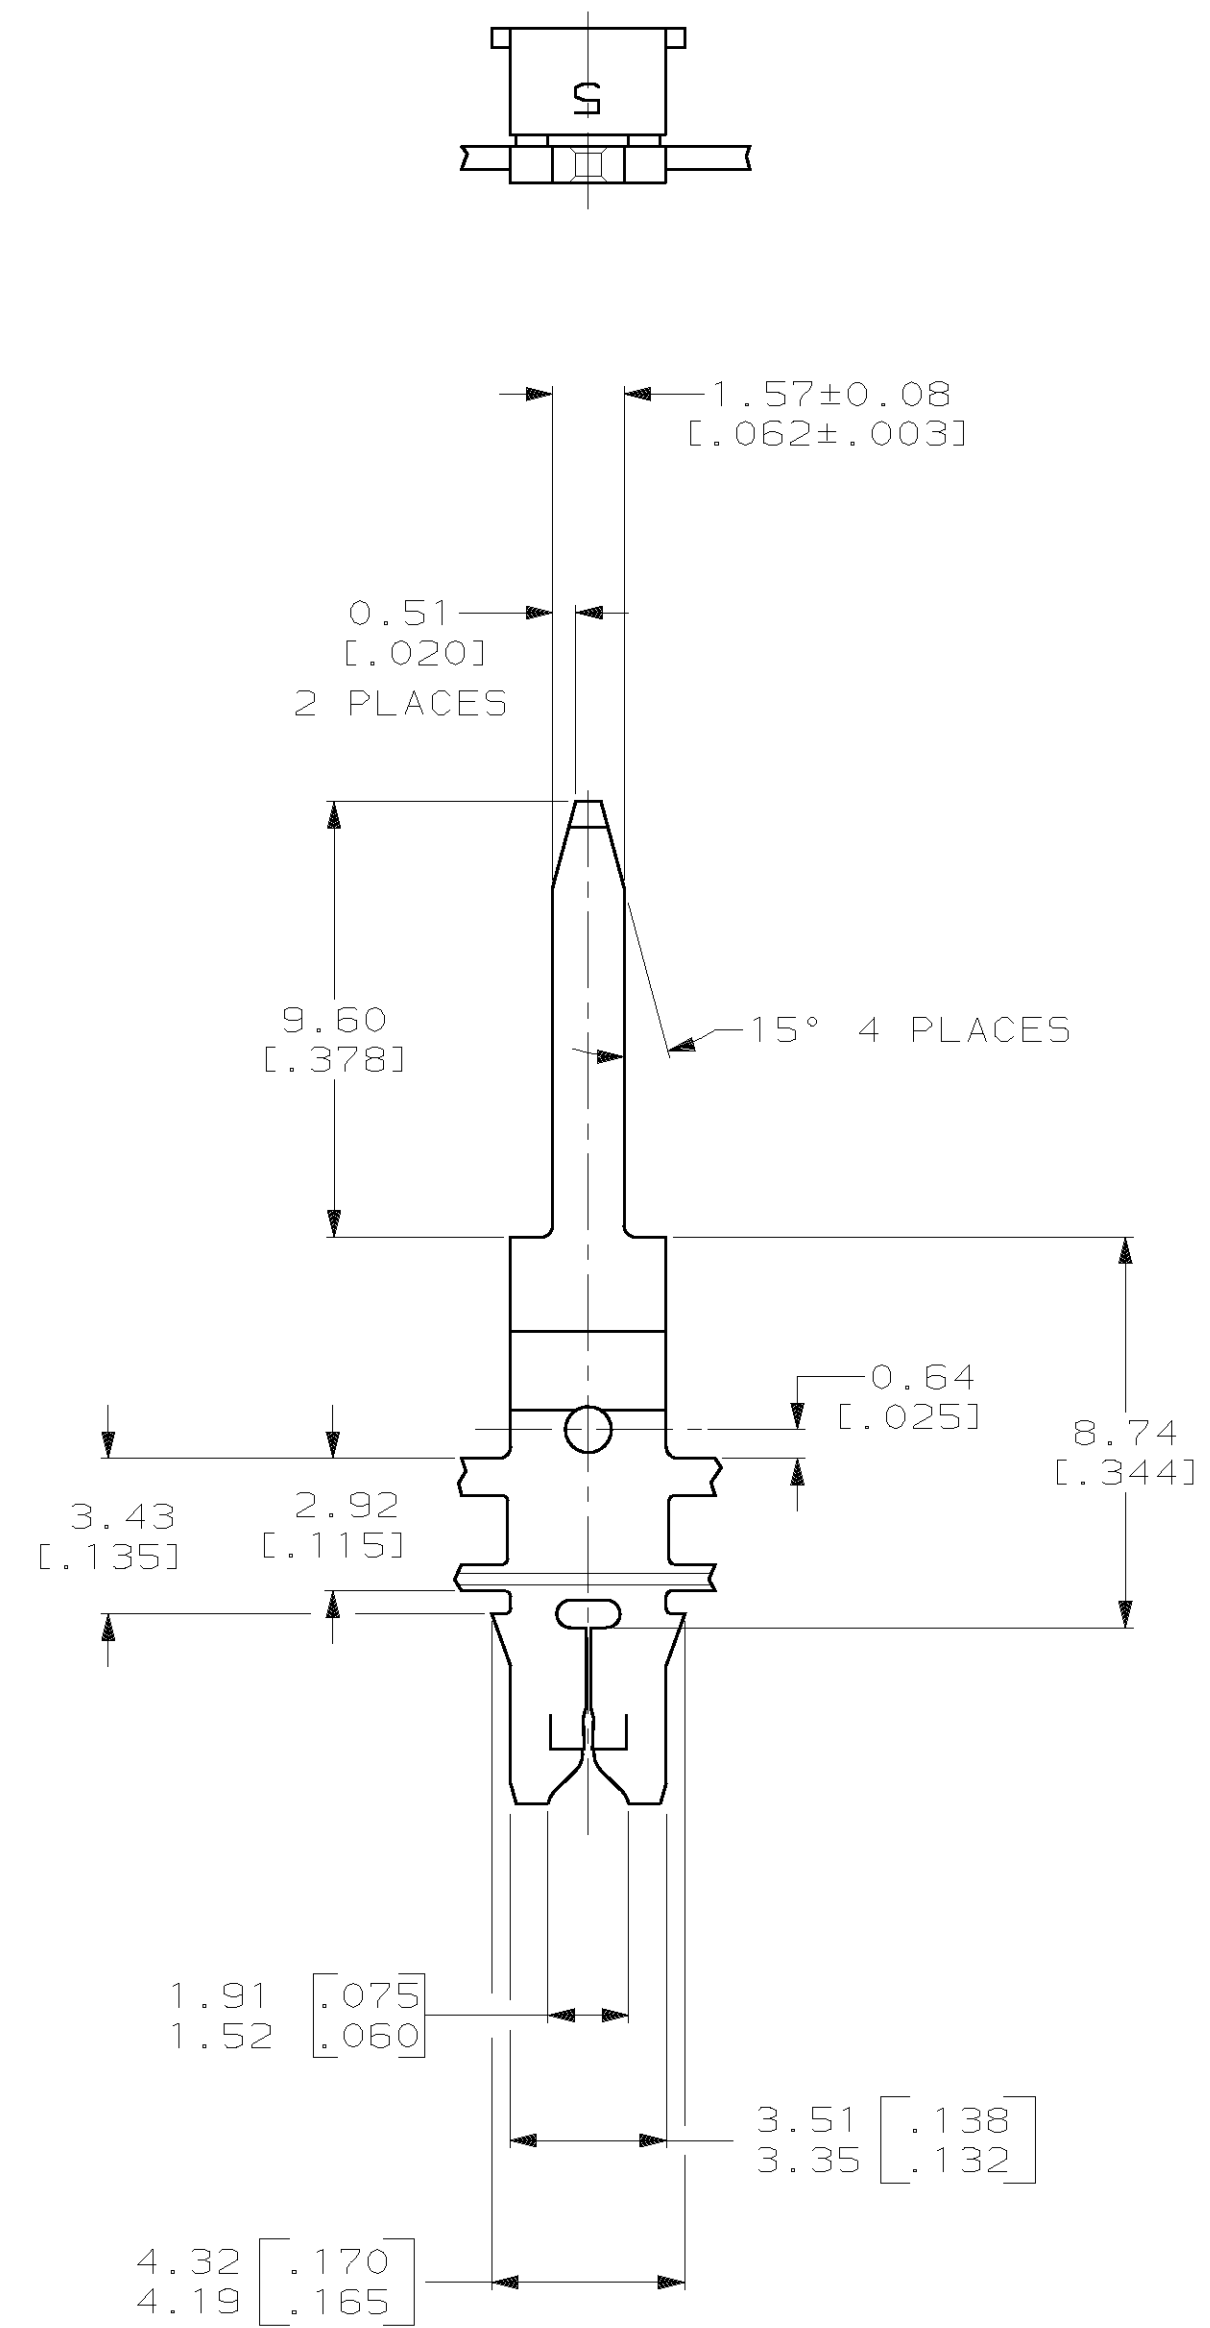

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:		DR 2/JAN/95 R.GRZYBOWSKI		AMP Incorporated Harrisburg, PA 17105-3508	
2 PLC DEC ± 0.15[.006]		CHK 2/JAN/95 M.S.FEHER			
3 PLC DEC ± -		APPD 2/JAN/95 N.E.NEFF		NAME	
ANGLES ± -		APPD 2/JAN/95 T.L.SHUTTER		TAB, 1.57[.062], 300 SERIES MAG-MATE™	
MATERIAL		PRODUCT SPEC		SIZE	
4M PRE-MILLED BRASS		108-2012		D 00779 C-63810	
FINISH		APPLICATION SPEC		CAGE CODE	
0.002032[.000080] MIN TIN		114-2046		DRAWING NO	
WEIGHT		-		SCALE	
				6:1	
				SHEET	
				1 OF 1	

63810-1
PART NO